

IZIG







OUTDOOR SERIES

MANUAL / MANUAL LED FLOOD LIGHT, 100-277VAC




| Designation | IZIG 15 OUTDOOR SERIES | IZIG 30 OUTDOOR SERIES | IZIG 50 OUTDOOR SERIES |
|--|----------------------------------|----------------------------------|----------------------------------|
| Power / Consumption | 15 W | 30 W | 50 W |
| Voltage / Voltage | 100-277VAC | | |
| Power Factor / Facteur de puissance | > 0.95 | | |
| Frequency / Frequency | 50 - 60Hz | | |
| Indice IP | IP 65 | | |
| Weight / Poids | 0.7 kg | 2.3 kg | 3.1 kg |
| Lumen | 1200 | 2400 | 4000 |
| CRI | >68 | >80 | >80 |

PRODUCT SIZE / PRODUCT SIZE :

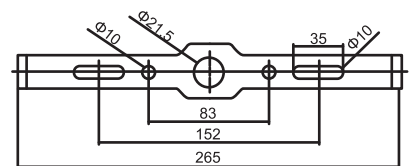

Installation Steps:

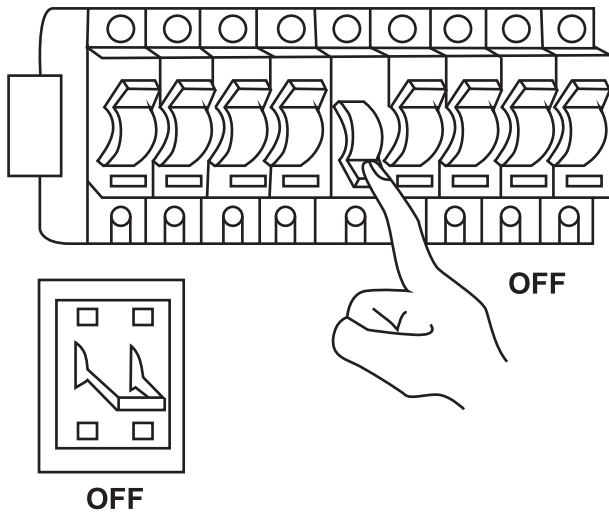

Safety instruction

How to install our floodlight safety?

1. Disconnect power before installing or servicing. The fixture must be wired in accordance with the National Electrical Code and applicable local codes and ordinances.
2. All wiring should be performed by a qualified electrician.
- ! 3. The fixture is for outdoor use and should not be used in areas with limited ventilation or high ambient temperatures.

INSTALLATION-Surface Mounting

1. Do not remove any part of the fixture.
2. Check the specification on the label.
3. Use expansion bolts to secure the fixture on mounting surface.
4. Keep enough length wires to ensure adjusting angle unhindered.
5. Connect wires into wiring terminal, fix them by screws.
6. Please check the main specification before wiring.

MANUEL D'INSTALLATION

Instruction de sécurité

Comment installer nos projecteurs en toute sécurité?

1. Couper le courant avant toute installation. Le projecteur doit être connecté en accord avec les normes électriques françaises et les codes locaux applicables.
2. Tous les cablages doivent être effectués par un électricien qualifié.
- ! 3. Le projecteur est dessiné pour une utilisation en extérieur uniquement et ne doit pas être installé dans un environnement non ventilé ou à haute température ambiante.

INSTALLATION-Support extérieur

1. Ne retirer aucun élément du projecteur.
2. Vérifier les spécifications sur l'étiquette.
3. Utiliser des boulons d'expansion pour le montage afin de sécuriser la fixation du projecteur.
4. Conserver suffisamment de longueur de câble pour assurer un ajustement de l'angle d'éclairage.
5. Connecter les câbles aux cosses et les fixer avec des vis.
6. Merci de vérifier les spécifications principales avant d'installer le projecteur.

